

SPECIFICATIONS



- ~ MS6 LED modules utilize the latest 1W LED technology
- ~ All modules are sealed, waterproof for external mounting applications.
- ~ Each module has 6 led
- ~ Ideally suited for use in directional warning solutions
- ~ Multiple flash patterns built-in
- ~ Available models:
 - MS6-S-X-F Single Color
 - MS6-S-XX-F Dual Color
- ~ Meets SAE Class 1
- ~ Current Draw: 0.4A Solid ON / 0.160A Average Pattern ON
- ~ Synchronous or alternate operation
- ~ Input Voltage: 12-24 VDC Nominal

Dimensions:

MS6-S-X-F Surface Mount 6 LED's Module

Dimensions: W-3.25", H-1.25", D-1.1"

MS6-F-X-F Flush Mount 6 LED's Module

Dimensions: W-3.25", H-1.5", D-1.0"

Part number legend:

MS6 - CHASSIS TYPE - PRIMARY COLOR - *SECONDARY COLOR - FLASH STYLE

S – Surface Mount

F - Flush Mount

R—Red

B—Blue

A-Amber

C-Clear

R-Red

B-Blue

A-Amber


C-Clear

F-Flashing Module

* For Lights w/Dual color

Available Brackets for Surface Mount MS6 LED Lights:

1. **936-0397A** - Single L Bracket, 2" Tall
2. **936-0398A** - Double L Bracket, 2" Tall
3. **936-0400A** - Single L Bracket, 4" Tall
4. **936-0401A** —Double L Bracket, 4" Tall
5. **936-0402A**—Triple L Bracket, 4" Tall

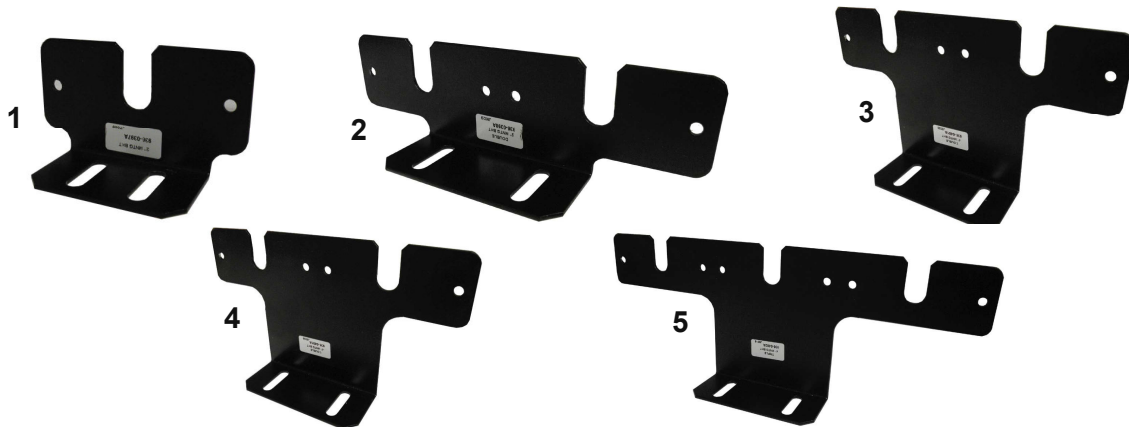

Canada: 8820 George Bolton Pkwy. Bolton, ON L7E 2Y4 | TF: 800-538-7338

USA: 2299 Kenmore Ave. Building 3, Doors 11-14, Buffalo, NY 14207

ISO 9001:2015 REGISTERED COMPANY